


CGCD316 Cellar Door

"All Gates may look alike! Only a CITY-GATE is built to last"

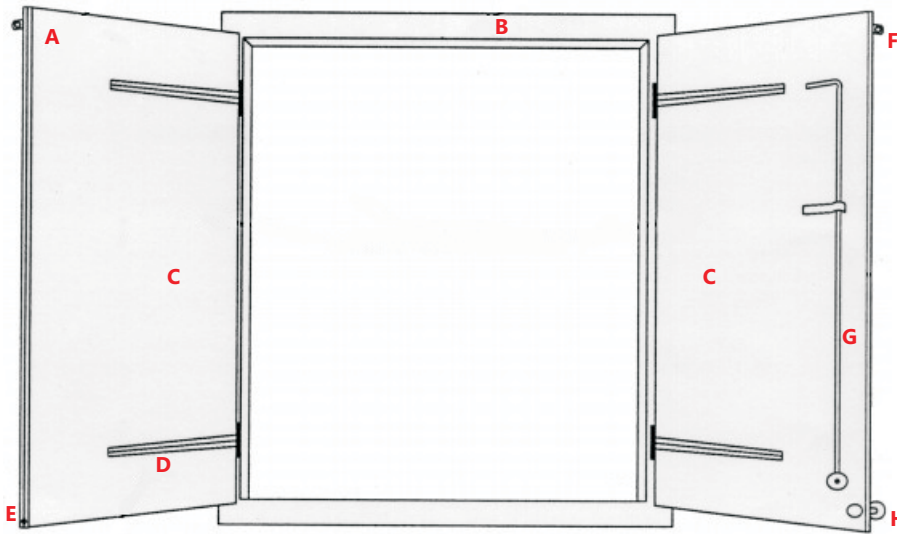

- A** 2"x3"x3/16" reinforcing angle
- B** 3"x3"x3/16" angleline steel frame
Welded construction
- C** 3/16" diamond plate
- D** 1-1/2"x1/2" rectangular steel pivot hinge
assembly
- E** Drop hole for safety bar
- F** Outside locking hasps
- G** Safety bar
- H** Recessed lifting handle

SPECIFICATIONS

Furnish commercial steel cellar door as manufactured by CITY GATES complete with options as specified. Each door is custom built to the dimensions of the opening.

Doors consists of a minimum of 3/16" thick steel diamond plate. Doors to be hinged to frame using 1.2" x 1-1/2" bar hinges. Doors to have a recessed lifting handle and integrated safety bar. This is not a water proof unit.

Frame to be made from an assembly of 3"x3"x3/16" structural steel angles welding together.

Mounting may be to brick, cement or steel.

Locking can be of two types, either hasps with a padlock from the outside or slidebolts from the inside.

Finish all non-galvanized surfaces shall receive a shop coat of rust inhibiting grey or bronze industrial enamel paint. Field painting not included in this section.

Installation to be by CITY GATES or by an authorized dealer.



OPTIONS

- 1/4" thick diamond plate doors
- 4"x4"x1/4" or 4"x3"x1/4" structural angle frame
- Matching stationary top or side panels
- Vent holes
- Stainless steel construction